


65HD Hydraulic Vibrator Standard Frequency



Eccentric moment	65	m.kg
Maximum hydraulic power	332 / 451	kW / HP
Maximum frequency	26 / 1560	Hz / rpm
Maximum centrifugal force	1768	kN
Maximum line pull capacity	600	kN
Vibrating weight without clamp	4700	kg
Total weight without clamp	6300	kg
Maximum amplitude	27,7	mm
Length	2,300	m
Maximum width	0,926	m
Centre width	0,330	m
Height without clamp	2,394	m

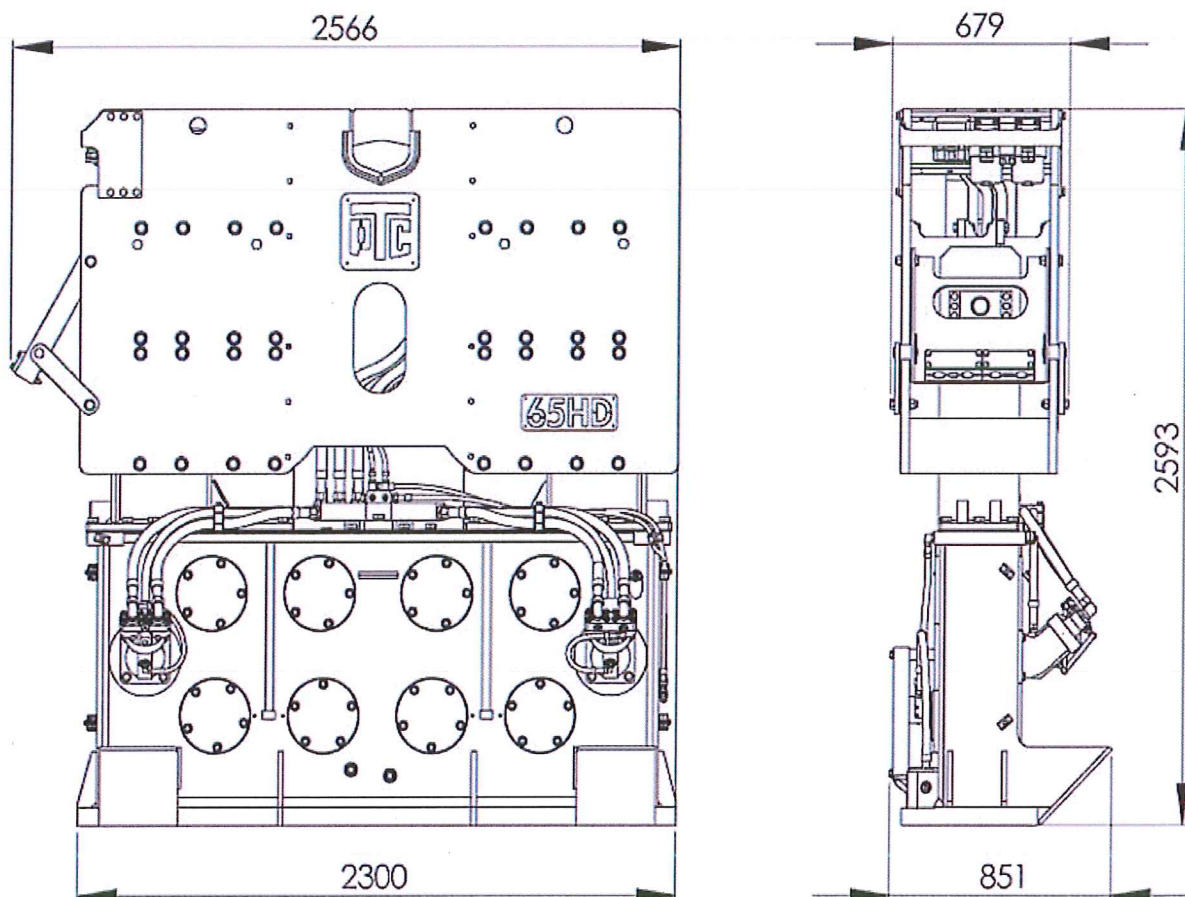

PTC

56 rue de Neuilly – 93136 NOISY LE SEC Cedex - France



Tel: +33.(0)1.49.42.72.95

Fax: +33.(0)1.48.44.00.02

E-mail: contact@ptc.fayat.com www.ptc.fayat.com



600C

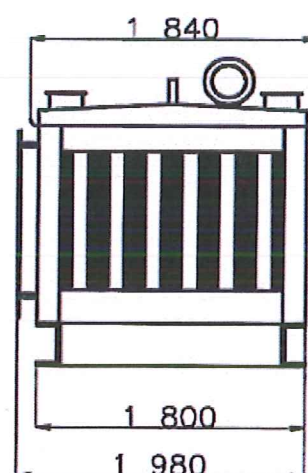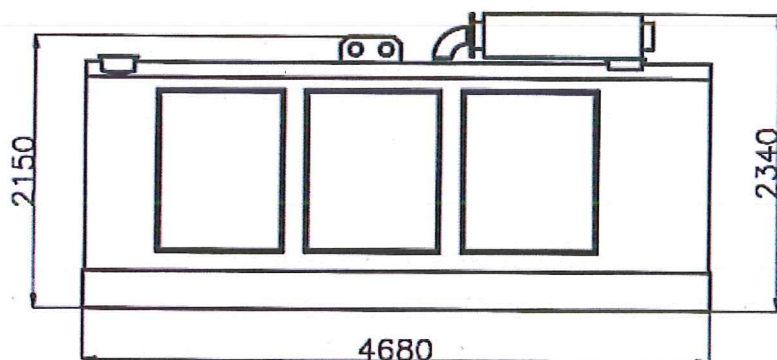

Engine model	CAT C15 ACERT	
Certified emission level	Tier 3	
Engine power	403 / 548	kW/HP
Rotation speed	2250	rpm
Maximum oil flow	580	L / min
Maximum working pressure	385	bar
Hydraulic oil tank capacity	690	L
Fuel tank capacity	1080	L
Length	4,68	m
Width	1,80	m
Height	2,34	m
Weight	6600	kg



PTC

56 rue de Neuilly – 93136 NOISY LE SEC Cedex - France

Tel: +33.(0)1.49.42.72.95

Fax: +33.(0)1.48.44.00.02

E-mail: contact@ptc.fayat.com

Site: www.ptc.fayat.com






n° 353806


PTC 2 X 120Ton Duplex Casing clamps

For mounting under PTC 65HD vibrator with 2 x T-bars

Technical data of each clamp

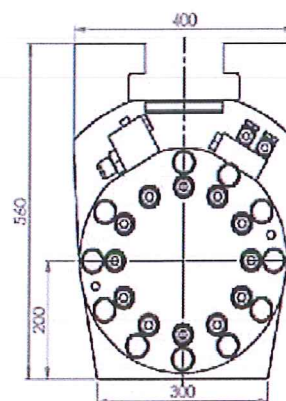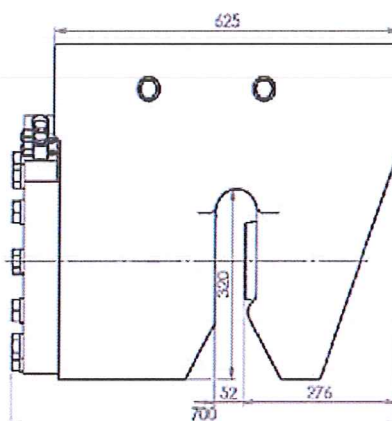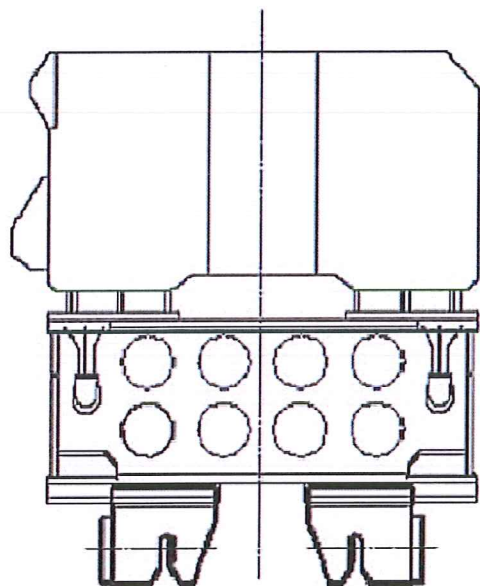

Weight of each clamp	700	kg
Clamping Force of each clamp	1200	kN
Working pressure of each clamp	320	bar

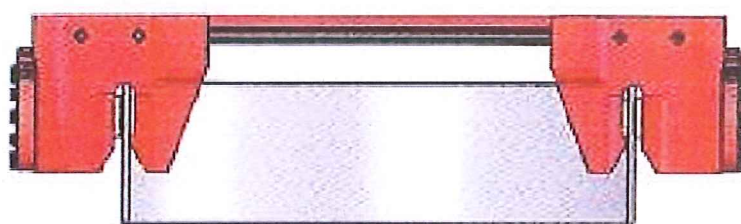

2 x 120ton Duplex casing clamps
Mounted directly under the 65HD vibrator:

Maximum casing diameter: 1734mm OD
Minimum casing diameter: 580mm ID



PTC

158 rue Diderot – 93698 PANTIN CEDEX - France

Tel: +33.(0)1.49.42.72.95

Fax: +33.(0)1.48.44.00.02

E-mail: contact@ptc.fayat.com

Site: www.ptc.fayat.com

